

Standard wire:

L/live wire:Black\Brown; N/null wire:White\Blue;
Ground wire:Green\Yellow-green.

Warning/Avertissement:


MIN 75 °C SUPPLY CONDUCTOR

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH
THE APPLICABLE INSTALLATION CODE BY A PERSON
FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF
THE PRODUCT AND THE HAZARDS INVOLVED

LES FILS D'ALIMENTATION 75 °C MIN

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE
CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE
QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT
AINSI QUE LES RISQUES INHÉRENTS.

LED Shoebox Light Instruction

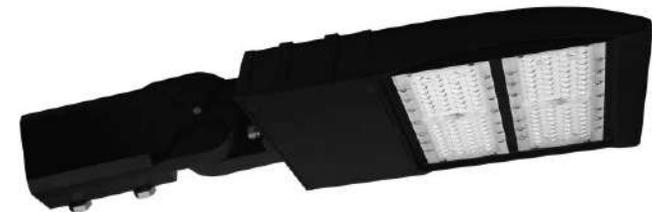

Cautions:

- 1.Can not use the electric generator to test the LED lamp.
2. Please abide by related country, regional and local law and regulations when install this fixture.
3. To avoid electrical shock and damage, please do not install the lights in raining days.

Notices:

1. To prevent from electric shock or fire risk, the installation must be conducted by operator who have professional electrical knowledge.
2. Please wear gloves to avoid injury before installing lamps.
3. During or after installation, if there are situations such as smoke, fire in the wires or lamps, please turn off the power immediately and notify relevant personnel of an overhaul.
- 4.This light can be used for outdoor installation.

**Installation I:
ADJUSTABLE FITTER MOUNTING**

1. Loosen the 4 locking bolts on the slip fitter, connect the wire correctly and put the wire into pole. Then fasten the locking bolts between slip fitter and the pole. (figure 1)
2. Loosen the fixing bolts and adjusting bolts, align the fixture to required angle. Tighten adjusting bolt and fixing bolts after the angle is confirmed. (figure 1)

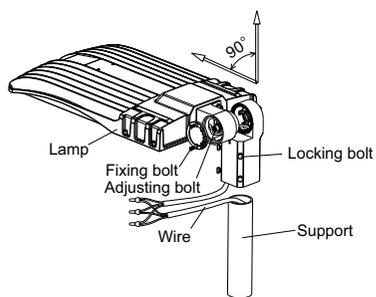


figure 1

**Installation II:
YOKE MOUNTING**

1. Loosen cap fixing screw and take cap off. Loosen fixing bolt, fixed the fixture on the support and tighten fixing bolts. (figure 2)
2. Let the AC wire go through support hole and connected correctly. Close cap and tighten cap fixing screw after AC cable is well placed in the support. (figure 2)
3. Loosen adjusting screws, align the fixture to required angle and fasten the screws. (figure 2)

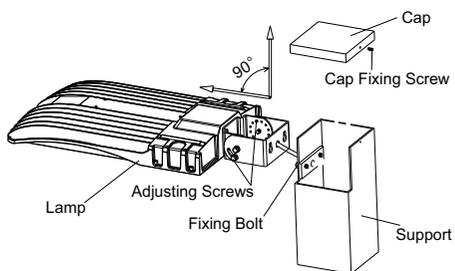


figure 2

**Installation III:
DIRECT MOUNTING**

1. Loosen cap fixing screw and take cap off. Loosen fixing bolt, fixed the fixture on the support and tighten fixing bolts. (figure 3)
2. Correctly connecting the wire and fasten cap fixing screw and fixing screw. (figure 3)

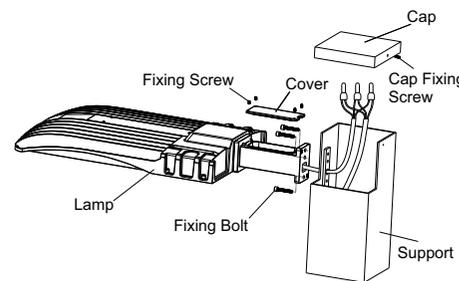


figure 3

Notice: Round pole should be with additional adapter plate. (figure 4)

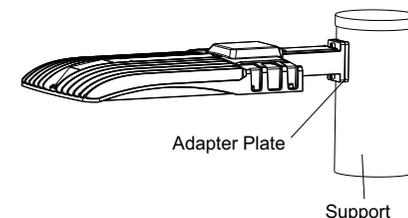


figure 4

**Installation IV:
FLOOD MOUNTING**

1. Use the electric drill to drill holes on the poles or suspended walls . (The hole pitch should be according to the actual application of products, the hole size should be same as the screw the user has). (Figure 5,6)
- 2.Put the installation bracket on the pole position, and using screws and nuts to fix the light tight,adjust to the desired light angle.
- 3.According to the local wiring to connect the product to the mains and do a good job of thread protection measures, plug the wire into the poles, cover the pole cover, tighten the side screws.(Figure 7)




figure 5



figure 6

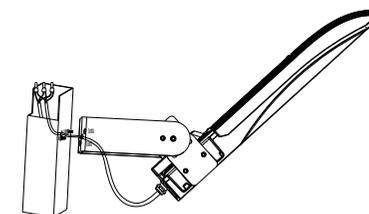


figure 7